





- Carbon fiber light weight with spring system for inside /outside measurements
- Interchangeable jaws and rods with shaft \varnothing 3,5
- height adjustable supports for measurements
- Dial gauge shaft \varnothing 8
- Supplied with: couple of interchangeable rods art.TS3, supports APM & APF, jaws art.BEC 35L, dial gauge 0.01 \varnothing 60
- Calibro a comparazione in fibra di carbonio con precarica per misurazioni interne ed esterne
- Bracci e puntali intercambiabili con attacco \varnothing 3,5
- Supporti regolabili in altezza per misurazioni sull'asse richiesto
- Attacco comparatore \varnothing 8
- Dotazione standard: coppia terminali intercambiabili TS 3, appoggi APM e APF regolabili in altezza, coppia becche BEC 35L, comparatore \varnothing 60 con lettura 0,01 mm

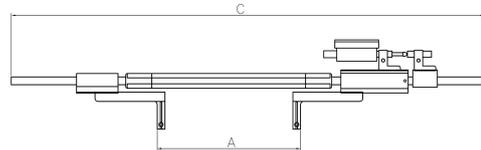


NEW

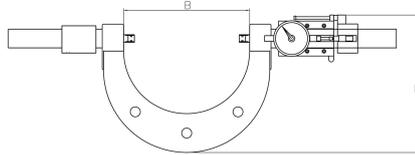

Article	A Range	B	C	D	Repeatability	Code	Kg
ARACNE 200	\varnothing 170 - 680	200	620	220	0.002	00670	1,800
ARACNE 270	\varnothing 240 - 750	270	690	255	0.002	00684	2,000
ARACNE 320	\varnothing 290 - 800	320	740	280	0.002	00685	2,200

STANDARD EQUIPMENT DOTAZIONE STANDARD

Interchangeable jaws
Coppia bracci intercambiabili

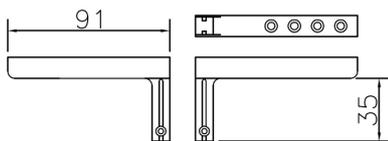


Article	Code	Kg
BEC 35L	00586	0.080

Height adjustable supports
Appoggi regolabili in altezza



Article	Code	Kg
APM	00587	0.008
APF	00588	0.014

STANDARD EQUIPMENT \varnothing 3



For interchangeable rods see pag.134 DEMM catalogue
Per i terminali intercambiabili vedere pag.134 catalogo DEMM

APPLICATION APPLICAZIONE

