


# IP65 WATER PROOF DIGITAL OUTSIDE MICROMETER

- With large easy-to-read LCD screen
- Strictly made in accordance with DIN863
- Spindle hardened, ground and lapped for ultimate accuracy
- With spindle lock
- With Absolute, Inch-Metric Conversion and Zero-Set function
- IP65 protection against liquid
- Stainless steel newly adapted on spindle
- Carbide measuring surfaces ground for longer service life

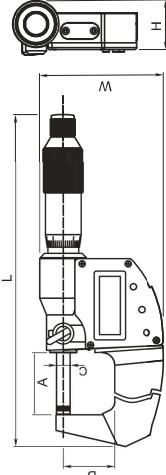

Unit:mm

Code	Range	Resolution	Graduation	A	B	C	L	W	H	Accuracy
4410-1105	0-25/0-1"	0.001/0.00005"	0.01	29.8	24.5	φ6.5	159.5	59.6	23.5	0.003/0.00015"
4410-1110	25-50/1-2"	0.001/0.00005"	0.01	55.3	31	φ6.5	188.5	75.7	23.5	0.003/0.00015"
4410-1115	50-75/2-3"	0.001/0.00005"	0.01	80.8	44	φ6.5	219	90.7	23.5	0.004/0.00015"
4410-1120	75-100/3-4"	0.001/0.00005"	0.01	105.8	56	φ6.5	246.5	107.2	23.5	0.004/0.00015"
4410-1125	100-125/4-5"	0.001/0.00005"	0.01	130.8	68	φ6.5	278	125.3	23.5	0.005/0.0002"
4410-1130	125-150/5-6"	0.001/0.00005"	0.01	155.8	81	φ6.5	307.5	141.3	23.5	0.005/0.0002"


Unit:mm

Code	Range	Resolution	Graduation	A	B	C	L	W	H	Accuracy
4410-2405	0-25/0-1"	0.001/0.00005"	0.0001"	29.8	24.5	φ6.5	159.5	59.6	23.5	0.003/0.00015"
4410-2410	25-50/1-2"	0.001/0.00005"	0.0001"	55.3	31	φ6.5	188.5	75.7	23.5	0.003/0.00015"
4410-2415	50-75/2-3"	0.001/0.00005"	0.0001"	80.8	44	φ6.5	219	90.7	23.5	0.004/0.00015"
4410-2420	75-100/3-4"	0.001/0.00005"	0.0001"	105.8	56	φ6.5	246.5	107.2	23.5	0.004/0.00015"
4410-2425	100-125/4-5"	0.001/0.00005"	0.0001"	130.8	68	φ6.5	278	125.3	23.5	0.005/0.0002"
4410-2430	125-150/5-6"	0.001/0.00005"	0.0001"	155.8	81	φ6.5	307.5	141.3	23.5	0.005/0.0002"

# IP65 WATER PROOF DIGITAL OUTSIDE MICROMETER

## WITH ADJUSTABLE ANVILS

- Strictly made in accordance with DIN863
- Wide measuring range with adjustable anvil
- High accuracy standard collars enable that reading does not have to be reset when changing collars
- Standard collars: Within 1000mm/40":.25mm/1", 50mm/2"
- With carbide measuring faces
- Pipe combined frame for light weight and high rigidity
- IP65 protection against liquid

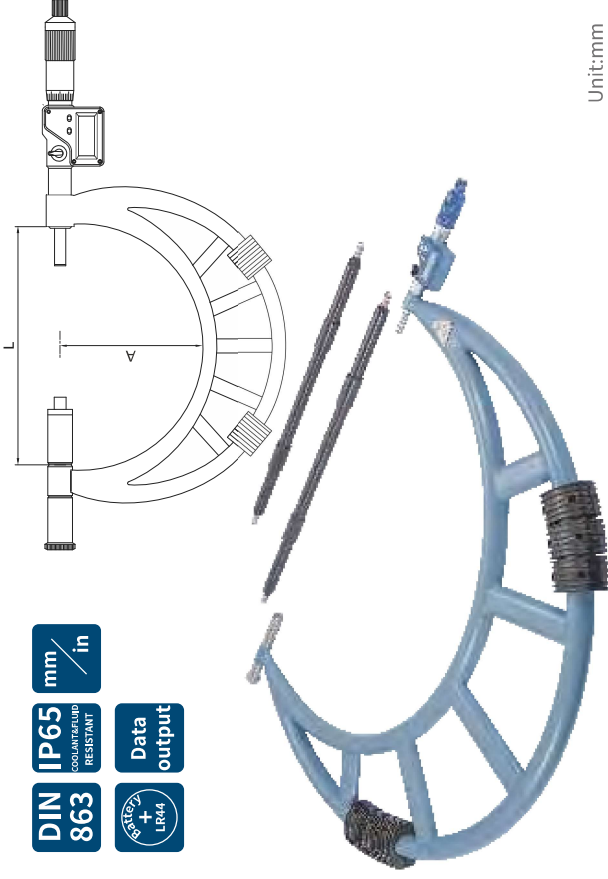

Unit:mm

Code	Range	A	L	Resolution	Accuracy
4905-0005	300-400	224	409	0.001/0.00005"	0.011
4905-0006	400-500	275	509	0.001/0.00005"	0.013
4905-0007	500-600	321	609	0.001/0.00005"	0.015
4905-0008	600-700	371	709	0.001/0.00005"	0.016
4905-0009	700-800	426	809	0.001/0.00005"	0.018
4905-0010	800-900	476	909	0.001/0.00005"	0.020
4905-0011	900-1000	576	1009	0.001/0.00005"	0.020