


Tiefenmessschieber mit Stift

- DIN 862
- Auflösung 0,01 mm/0,0005 inch
- Auto off
- mit Feststellschraube
- Messbrücke 100 mm
- Batterie CR2032
- inkl. Etui
- Stift: Länge 5mm, \varnothing 2mm




Digital depth gauge with pin




- DIN 862
- Resolution 0,01 mm/0,0005 inch
- Auto off
- With locking screw
- Measurement bridge 100 mm
- Battery CR2032
- incl. box
- measuring pin: length 5mm, \varnothing 2mm

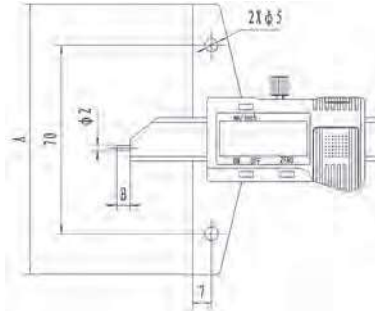

passende Messbrücke auf S. 50



A = 100 mm
B = 5 mm

> mm <	 mm	 inch	 mm	No.
150	0,01	0,0005	100	100-826
200	0,01	0,0005	100	100-827
300	0,01	0,0005	100	100-828




Tiefenmessschieber mit Stift

- DIN 862
- Auflösung 0,01 mm/0,0005 inch
- Auto off
- mit Feststellschraube
- Messbrücke 100 mm
- Batterie CR2032
- inkl. Etui
- Stift: Länge 5mm, \varnothing 1,5mm



Digital depth gauge with pin

- DIN 862
- Resolution 0,01 mm/0,0005 inch
- Auto off
- With locking screw
- Measurement bridge 100 mm
- Battery CR2032
- incl. box
- measuring pin: length 5mm, \varnothing 1,5mm

> mm <	 mm	 inch	 mm	No.
150	0,01	0,0005	100	120-451
200	0,01	0,0005	100	120-452
300	0,01	0,0005	100	120-453