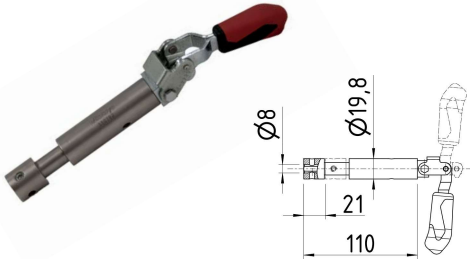

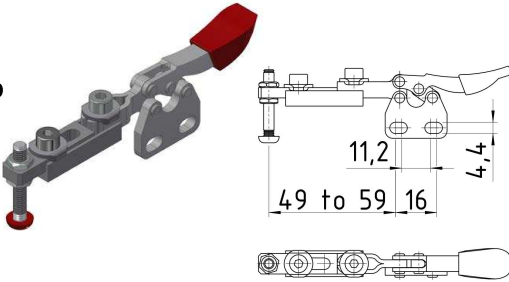

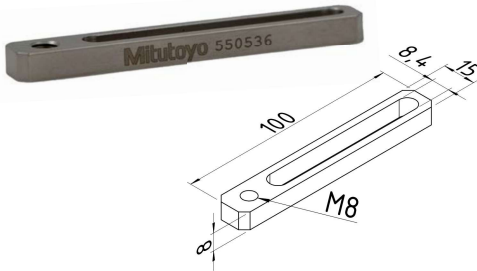

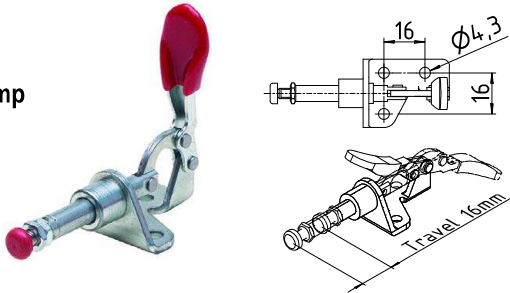

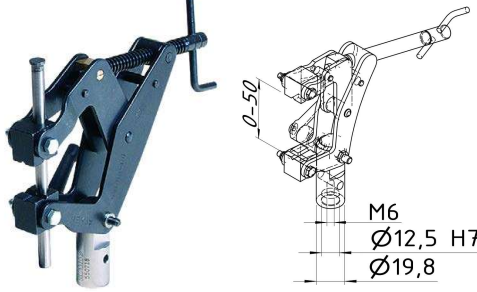



eco-fix · eco-fix<sup>plus</sup>

	APPLICATION	PRODUCT LINES
<p><b>Part No.: K551325</b> Weight 297 g</p> <p><b>Axially adjustable center mount</b> For holding workpieces in bores that must be cleared again for measurement.</p> 		eco-fix eco-fix <sup>plus</sup>
<p><b>Part No.: K550277-10</b> Weight 42 g</p> <p><b>Adjustable toggle clamp</b> Toggle clamp with slidable adjustment of the clamping position.</p> 		eco-fix eco-fix <sup>plus</sup>
<p><b>Part No.: K550536-10</b> Weight 536 g</p> <p><b>Clamping extension M8</b> To extend the range of toggle clamp K550277-10 with pressure spindle M8.</p> 		eco-fix eco-fix <sup>plus</sup>
<p><b>Part No.: K550492-10</b> Weight 40 g</p> <p><b>Vertical push rod clamp</b> For clamping workpieces in vertical position.</p> 		eco-fix eco-fix <sup>plus</sup>
<p><b>Part No.: K551336</b> Weight 450 g</p> <p><b>Clamping hand</b> For quick and easy clamping of workpieces.</p> 		eco-fix eco-fix <sup>plus</sup>