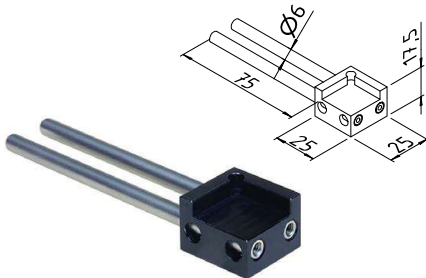
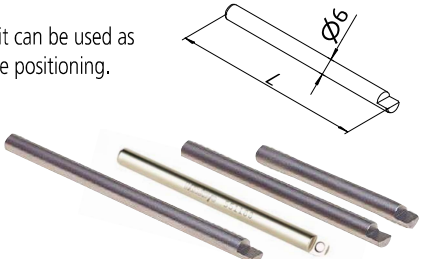

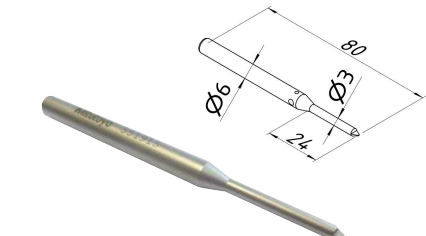
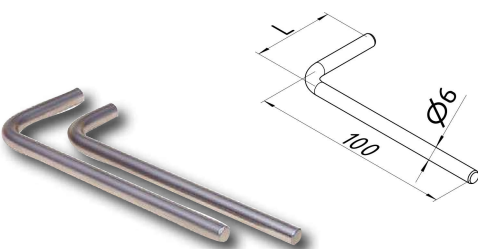
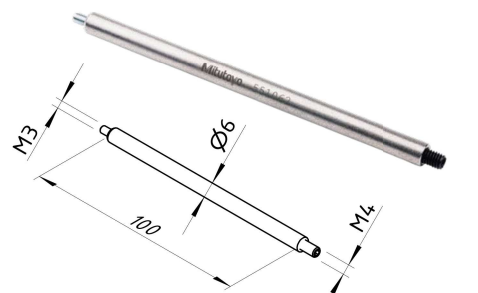


Positioning components

Toothed fixtures, pins and other positioning components

RECEIVER PINS		APPLICATION	PRODUCT LINES															
Part No.: K550304 Receiver plane L = 100 mm/ 25 mm x 25 mm In connection with the damping blocks, it can be used as direct workpiece locating element for free positioning. 			opti-fix															
Receiver pin stepped In connection with the damping blocks, it can be used as direct workpiece locating element for free positioning. <table><tr><th>Part No.:</th><th></th><th>L mm</th></tr><tr><td>K550301</td><td></td><td>60</td></tr><tr><td>K550302</td><td></td><td>80</td></tr><tr><td>K551188</td><td>magnet tip</td><td>80</td></tr><tr><td>K550303</td><td></td><td>100</td></tr></table> 		Part No.:		L mm	K550301		60	K550302		80	K551188	magnet tip	80	K550303		100		opti-fix
Part No.:		L mm																
K550301		60																
K550302		80																
K551188	magnet tip	80																
K550303		100																
Part No.: K551915 Receiver pin stepped small D 1 = 6 mm / D2 = 3 mm L = 80 mm / L1 = 25 mm In connection with the damping blocks, it can be used as direct workpiece locating element for free positioning of very small workpieces. 			opti-fix															
Rectangular receiver pin As receiving element, also for spring clips. <table><tr><th>Part No.:</th><th>L mm</th></tr><tr><td>K550990</td><td>50</td></tr><tr><td>K550323</td><td>25</td></tr></table> 		Part No.:	L mm	K550990	50	K550323	25		opti-fix									
Part No.:	L mm																	
K550990	50																	
K550323	25																	
Part No.: K551062 Shaft 6 mm x 100 mm In connection with the damping blocks, it can be used as direct workpiece locating element for free positioning of very small workpieces. 			opti-fix															