
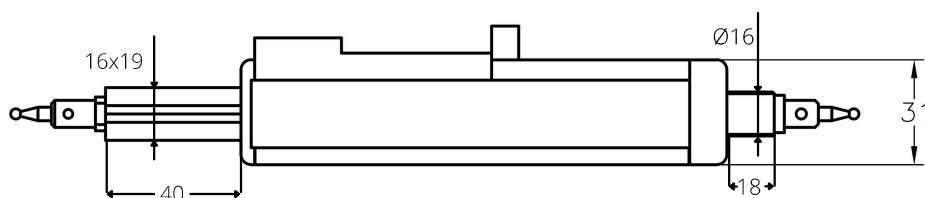


- Digital instrument for internal measurements with excursion of mm 50, spring system
- Interchangeable rods with sphere, $\varnothing$ by request
- Optional extensions in carbon fiber range 50 - 800 mm
- Large cursor excursion, for measurements of grooves depth 30 or 50 mm
- Manufactured on steel inox and aluminium
- Standard interchangeable rods $\varnothing 3$ sphere and 12mm length
- Strumento digitale per misurazione di interni con escursione mm 50, contatto a molla
- Puntali intercambiabili a sfera $\varnothing$ a richiesta
- Prolunghe opzionali per campo di lavoro fino a mm 800
- Grande escursione del cursore, per misurazioni di gole profonde mm 30 o 50
- Costruito in alluminio anodizzato e acciaio inox
- Puntalini con terminali a sfera $\varnothing 3$ di serie lunghezza 12mm

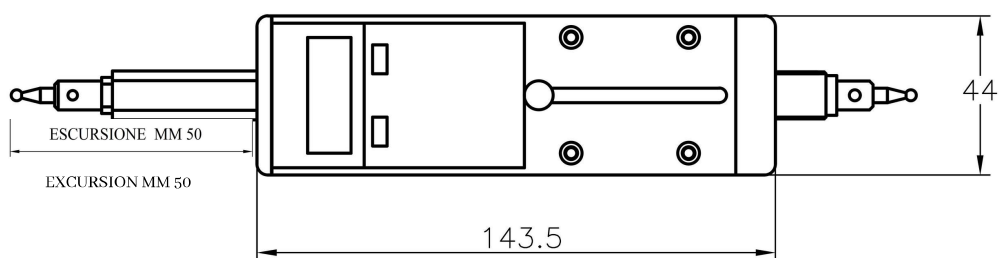

Article	Range	Resolution	Accuracy	Code	Kg
Mitra 30	125-155/800	0.01	± 0.01	00867	0.480
Mitra 50	200-250/800	0.01	± 0.01	00676	0.640
Mitra 100	250-350/1500	0.01	± 0.01	01900	0.800