
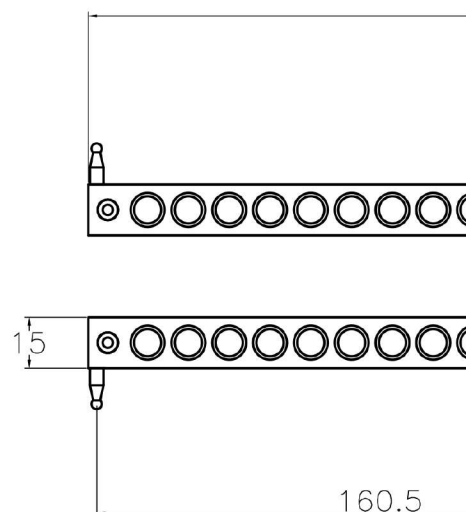
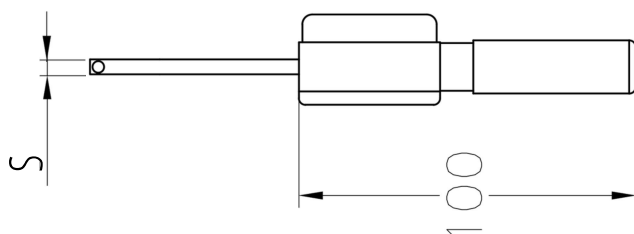
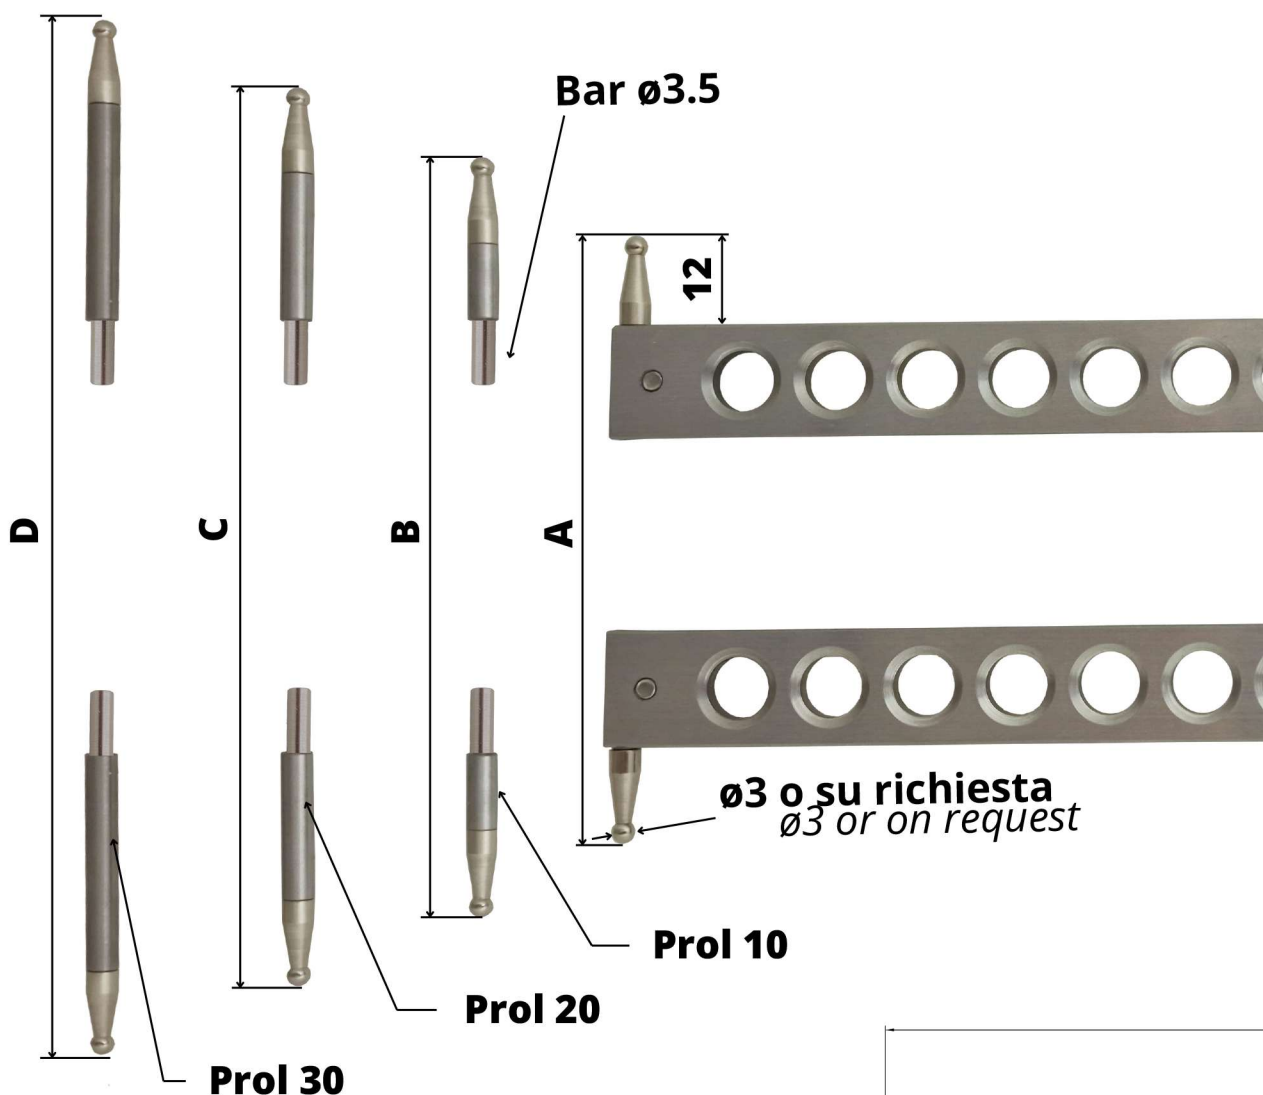


## DIGITAL DIAL GAUGES





| Article     | Range        | A     | B     | C      | D       | E  | S   | Accuracy | Resolution | Code  | Kg    |
|-------------|--------------|-------|-------|--------|---------|----|-----|----------|------------|-------|-------|
| IRIS IK 80  | < 44 - 128 > | 44-68 | 64-88 | 84-108 | 104-128 | 10 | 4.5 | 0.01     | 0.01       | 00847 | 0.360 |
| IRIS IK 120 | < 48 - 132 > | 48-72 | 68-92 | 88-112 | 108-132 | 12 | 4.5 | 0.01     | 0.01       | 00848 | 0.400 |
| IRIS IK 160 | < 54 - 138 > | 54-78 | 74-98 | 94-118 | 114-138 | 15 | 4.5 | 0.01     | 0.01       | 00859 | 0.440 |

## DIGITAL DIAL GAUGES

- Interchangeable tips
- Electronic module IP67 Big Numbers
- Functions: Preset, Min-Max-Delta, Scaling Factor
- Data transmission via PROXIMITY-USB
- ARM length 80/120/160 mm and total width of the arms 20/24/30 mm
- Excursion 24mm

- Puntali intercambiabili
- Elettronica IP67 Grandi Numeri
- Funzioni: Preset, Min-Max-Delta, Fattore di scala
- Uscita dati PROXIMITY-USB
- Lunghezza Bracci 80/120/160 mm con ingombro totale becche 20/24/30 mm
- Escursione 24mm

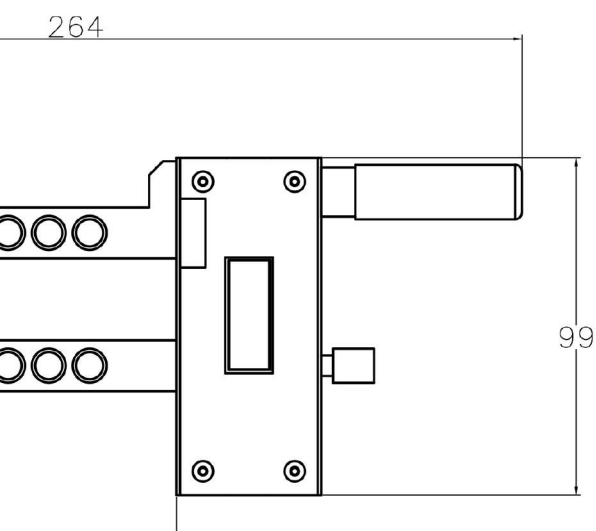

### PROLUNGHE OPZIONALI OPTIONAL EXTENSIONS

| Article | A (MM.) | Code  | Kg    |
|---------|---------|-------|-------|
| PROL 10 | 10      | 00860 | 0.005 |
| PROL 20 | 20      | 00861 | 0.006 |
| PROL 30 | 30      | 00862 | 0.007 |