

chisel - contacts
hardened HRC 55


subject to technical alterations

type: K
range: 0 - 30 mm
range of indication: 0 - 30,5 mm
digital step: 0,01 mm
scale interval: -
measuring force: 0,9 - 1,6 N
weight: 410 g

acceptable deviations
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)
max. permissible
errors "G": 0,04 mm
repeatability "r": 0,02 mm
reference temperature: 20° C
operation temperature: 10° C - 30° C
storage temperature: -10° C - 50° C

scale: 1:2
drawing-nr.: DAB-K3R30S-K-e
date of issue: 05.03.2021
name: B. Schmidt
revision status:
revision date:

interface as accessories available:

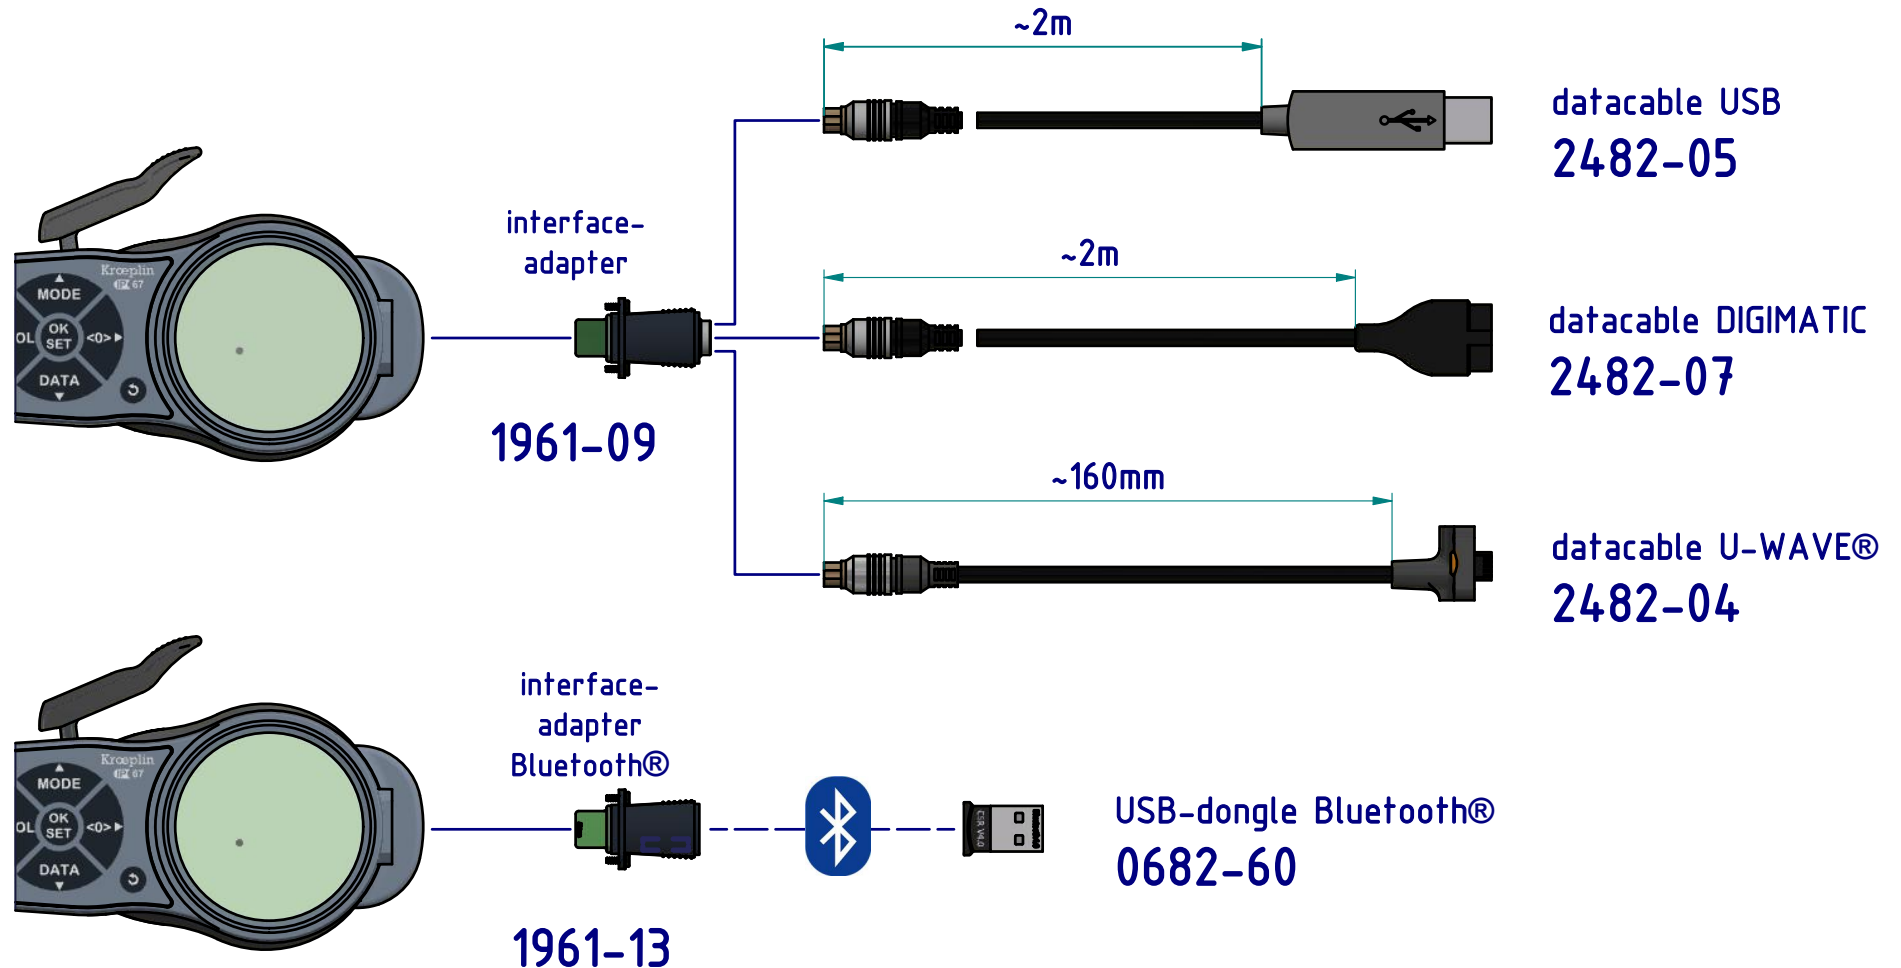

subject to technical alterations

drawing-nr.:	DAB-K3R30S-K-e
date of issue:	05.03.2021
name:	B. Schmidt
revision status:	
revision date:	