



Service MANOSKOP® torque wrench

730/2 Quick



Art.No. **50184002**
 GTIN **4018754292653**
 Model **730/2 QUICK**

Label. Torque wrench service MANOSKOP No. 730/2 Quick Measuring r. 4-20N·m Tool holders 9 x 12 mm L. 179mm

- Features.**
- click-type
 - the measuring element is only under load while force is being applied, no need for manual reset to zero
 - mount for interchangeable insert/shell tools
 - QuickRelease safety lock (sizes 5–65)
 - rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
 - ergonomically designed, non-slip adjuster with a thumb recess
 - magnifying glass integrated in the display window
 - optimised convex handle for strain-free working
 - dual stop signal
 - twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
 - on request also available as an N·m-only version without twin scale (sizes 5–65)
 - can be applied for either clockwise or anticlockwise tightening by turning the inserts over
 - any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
 - calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
 - certificate in accordance with DIN EN ISO 6789-2:2017
 - **display deviation value $\pm 4\%$**

Advantages.

Quick adjustment thanks to easy-to-operate clamping lever in handle

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free work

Efficient. No reset to "0" necessary, as measuring element is only strained during the tightening process

Releasing torque wrench with receptacle for exchangeable plug-in tools, double stop signal (tactile and audible), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation $\pm 4\%$

Product highlights.



Wear-resistant.

Wear resistant trigger system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. In this way, users benefit from long-term accuracy and safe measurement results with less time required.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Simple.


Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.

Technical Drawing.

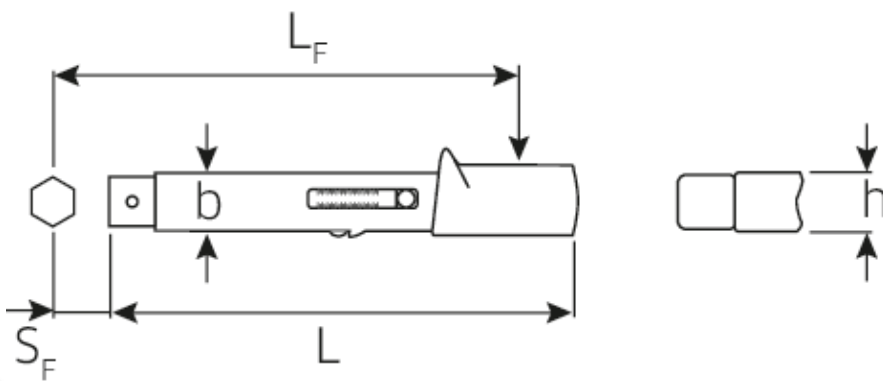

Technical Attributes.

Width mm (B)	27,5 mm
Size	2
Size square socket [inside square drive]	9 x 12 mm

Logistics data.

Depth mm (IFS)	182
Width mm (IFS)	45
Height mm (IFS)	30

Height mm (h)	23,6 mm	Length (packed, mm)	250
Length mm (L)	179 mm	Width (packed, mm)	55
LF	157,2 mm	Height (packed, mm)	55
Measuring range N·m	4-20 N·m	Volume (packed, dm ³)	0.75625 dm ³
SF	17,5 mm	Art. no.	50184002
Scale division [E1]	0,5 N·m	Weight (gross, kg)	0,400
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,066
		GTIN	4018754292653
		Country of origin	GERMANY
		Region of origin	Nordrhein-Westfalen
		WEEE/ElektroG	nicht ear-pflichtig
		Customs tariff no.	82041100
		Packing standard	1
		Weight	315 g

Variants.

Art. no.	Art. no. (ERP)	Description	GTIN
91381054	730/2 1 QUICK	Torque wrench No. 730 Quick Measuring r. 2-10N·m Tool holders 9 x 12 mm L. 179mm	4018754320325
50184002	730/2 QUICK	Torque wrench service MANOSKOP No. 730/2 Quick Measuring r. 4-20N·m Tool holders 9 x 12 mm L. 179mm	4018754292653
50184004	730/4 QUICK	Torque wrench service MANOSKOP No. 730/4 Quick Measuring r. 8-40N·m Tool holders 9 x 12 mm L. 223mm	4018754292660

GTIN-Code.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
 info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
 Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal