



## Basic wrench w.tool carrier for insert tools

### 730/65 Quick



Art.No. **50184065**  
 GTIN **4018754268894**  
 Model **730/65 QUICK**

#### Label.

Torque wrench service MANOSKOP No. 730/65 Quick Measuring-R. 130-650N·m  
 Inside square stitch size 14 x 18 mm L. 875mm

#### Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- magnifying glass integrated in the display window
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value  $\pm 4\%$**

## Advantages.

Fast setting with easy-to-operate clamping lever in the handle, integrated lens for better readability of the set value



Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free work

Efficient. No reset to "0" necessary, as measuring element is only strained during the tightening process

Releasing torque wrench with receptacle for exchangeable plug-in tools, double stop signal (tactile

and audible), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation  $\pm 4\%$

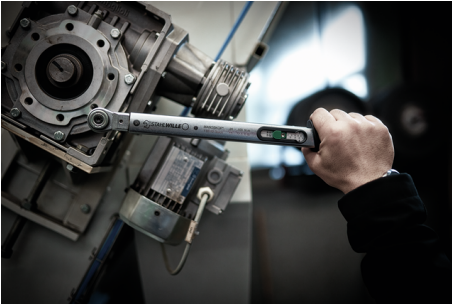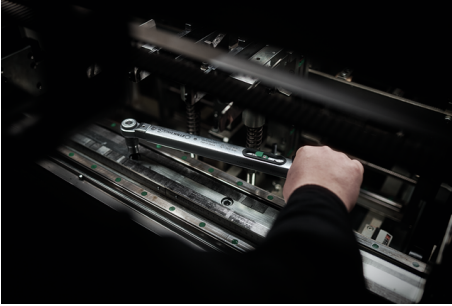

## Product highlights.



### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Wear-resistant.

Wear resistant trigger system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. In this way, users benefit from long-term accuracy and safe measurement results with less time required.



### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



### Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.


## Technologies and features.



### QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

## Technical Drawing.

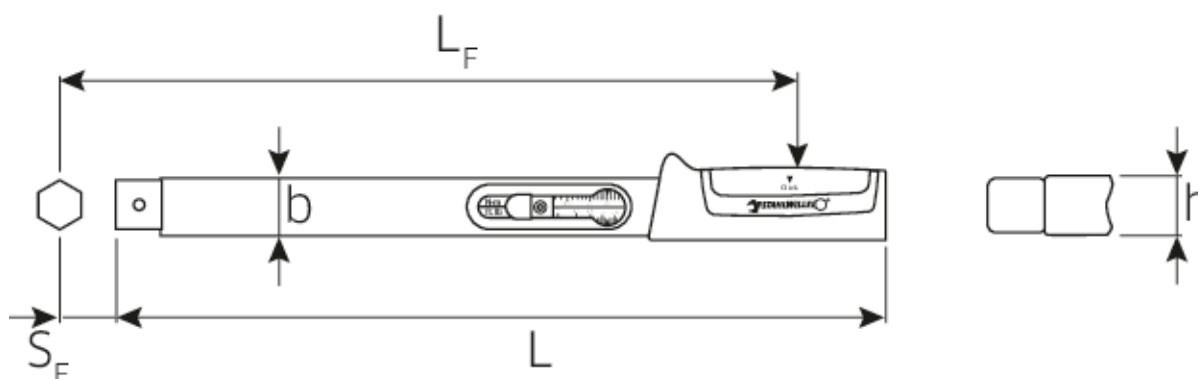

## Technical Attributes.

|                                       |               |
|---------------------------------------|---------------|
| Width mm (b)                          | 30,6 mm       |
| Size                                  | 65 1) 2)      |
| Size hexagon socket [internal square] | 14 x 18 mm    |
| Height mm (h)                         | 25,6 mm       |
| Length mm (L)                         | 875 mm        |
| LF                                    | 855 mm        |
| Measuring range ft-lb                 | 100-480 ft·lb |
| Measuring range N-m                   | 130-650 N·m   |
| SF                                    | 25 mm         |
| Scale division [E1]                   | 20 N·m        |
| Scale division [E2]                   | 20 ft·lb      |

## Logistics data.

|                     |                     |
|---------------------|---------------------|
| Length (IFS)        | 874                 |
| Width (IFS)         | 42                  |
| Height (IFS)        | 32                  |
| Length (packed, mm) | 1100                |
| Width (packed, mm)  | 150                 |
| Height (packed, mm) | 60                  |
| Volume (packed, mm) | 9.9 dm <sup>3</sup> |
| Artikelnummer       | 50184065            |
| Weight (gross, kg)  | 3,900               |
| Weight PAP (kg)     | 0,000               |
| Weight PVC (kg)     | 0,034               |
| GTIN                | 4018754268894       |
| Country of origin   | GERMANY             |

|   |                     |
|---|---------------------|
| <b>Region of origin</b>                         | Nordrhein-Westfalen |
| <b>WEEE/Electrical Act</b>                      | nicht ear-pflichtig |
| <b>Customs tariff no.</b>                       | 82041100            |
| <b>Numbers of content units per order units</b> | 1                   |
| <b>Weight</b>                                   | 3192 g              |

## Variants.

| Artikelnummer | Article number (ERP) | Article description (Autom.)  | GTIN          |
|---------------|----------------------|---|---------------|
| 50184005      | 730/5 QUICK          | Torque wrench service MANOSKOP No. 730/5 Quick Measuring-R. 6-50N·m<br>Inside square stitch size 9 x 12 mm L. 315mm           | 4018754268856 |
| 50184010      | 730/10 QUICK         | Torque wrench service MANOSKOP No. 730/10 Quick Measuring-R. 20-100N·m<br>Inside square stitch size 9 x 12 mm L. 370mm        | 4018754266203 |
| 50184012      | 730/12 QUICK         | Torque wrench service MANOSKOP No. 730/12 Quick Measuring-R. 25-130N·m<br>Inside square stitch size 14 x 18 mm L. 410mm       | 4018754268863 |
| 50184020      | 730/20 QUICK         | Torque wrench service MANOSKOP No. 730/20 Quick Measuring-R. 40-200N·m<br>Inside square stitch size 14 x 18 mm L. 455mm       | 4018754268870 |
| 50184030      | 730/30 QUICK         | Torque wrench service MANOSKOP No. 730/30 Quick Measuring-R. 60-300N·m<br>Inside square stitch size 14 x 18 mm L. 520mm       | 4018754324071 |
| 50184040      | 730/40 QUICK         | Torque wrench service MANOSKOP No. 730/40 Quick Measuring-R. 80-400N·m<br>Inside square stitch size 14 x 18 mm L. 590mm       | 4018754268887 |
| 50184065      | 730/65 QUICK         | Torque wrench service MANOSKOP No. 730/65 Quick Measuring-R.<br>130-650N·m Inside square stitch size<br>14 x 18 mm L. 875mm   | 4018754268894 |
| 50184565      | 730II/65 QUICK       | Torque wrench service MANOSKOP No. 730II/65 Quick Measuring-R.<br>130-650N·m Inside square stitch size<br>22 x 28 mm L. 897mm | 4018754268900 |

## GTIN-Code.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal