

## Basic wrench w.tool carrier for insert tools

### 730II/65 Quick



Art.No. **50184565**  
 GTIN **4018754268900**  
 Model **730II/65 QUICK**

#### Label.

Torque wrench service MANOSKOP No. 730II/65 Quick Measuring-R. 130-650N·m  
 Inside square stitch size 22 x 28 mm L. 897mm

#### Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- mount for interchangeable insert/shell tools
- QuickRelease safety lock (sizes 5–65)
- rapid setting thanks to easy-action locking lever in the handle (sizes 5–65)
- ergonomically designed, non-slip adjuster with a thumb recess
- magnifying glass integrated in the display window
- optimised convex handle for strain-free working
- dual stop signal
- twin scales N·m/ft·lb and N·m/in·lb (sizes 5–80)
- on request also available as an N·m-only version without twin scale (sizes 5–65)
- can be applied for either clockwise or anticlockwise tightening by turning the inserts over
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly.
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value  $\pm 4\%$**

## Advantages.

#### Releasing

Ergonomically shaped, non-slip adjustment element with thumb recess and optimised ball handle for fatigue-free working.

Efficient. No resetting to "0" necessary, as measuring element is only loaded during the tightening process.

Releasing torque spanner with receptacle for exchangeable plug-in tools, double stop signal (can be felt and heard), left-hand tightening by turning over the plug-in tools

With calibration certificate, display deviation  $\pm 4\%$ .



## Product highlights.



### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Wear-resistant.

Wear resistant trigger system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. In this way, users benefit from long-term accuracy and safe measurement results with less time required.



### Simple.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.



### Protected.

The internal mechanism is extremely resistant to mechanical wear and well protected against dirt and soiling inside the outer housing.



### Flexible rod principle.

Mechanical torque wrenches from STAHLWILLE have a wear-resistant trigger system with a flexible rod. In contrast to conventional torque wrenches with spiral springs, the STAHLWILLE system eliminates one key work step: once the fastener has been tightened, it is not necessary to reset the wrench to »0«.


## Technologies and features.



### QuickRelease

The QuickRelease technology ensures tools cannot be inadvertently lost – while enabling rapid, safe tool changes.

## Technical Drawing.

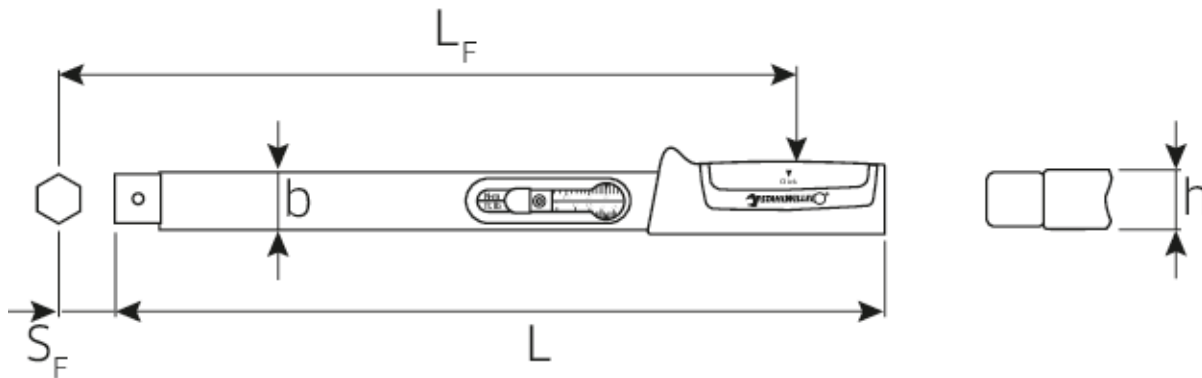

## Technical Attributes.

Width mm (b)	30,6 mm
Size	11/65 <sup>2)</sup>
Size hexagon socket [internal square]	22 x 28 mm
Height mm (h)	25,6 mm
Length mm (L)	897 mm
LF	907 mm
Measuring range ft-lb	100-480 ft·lb
Measuring range N·m	130-650 N·m
SF	55 mm
Scale division [E1]	20 N·m
Scale division [E2]	20 ft·lb

## Logistics data.

Length (IFS)	1040
Width (IFS)	150
Height (IFS)	80
Length (packed, mm)	1040
Width (packed, mm)	150
Height (packed, mm)	80
Volume (packed, mm)	12.48 dm <sup>3</sup>
Artikelnummer	50184565
Weight (gross, kg)	4,104
Weight PAP (kg)	0,000
Weight PVC (kg)	0,041
GTIN	4018754268900
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
WEEE/Electrical Act	nicht ear-pflichtig
Customs tariff no.	82041100
Numbers of content units per order units	1
Weight	4104 g

## Variants.

Artikelnummer	Article number (ERP)	Article description (Autom.)	GTIN
50184005	730/5 QUICK	Torque wrench service MANOSKOP No. 730/5 Quick Measuring-R. 6-50N·m Inside square stitch size 9 x 12 mm L. 315mm	4018754268856
50184010	730/10 QUICK	Torque wrench service MANOSKOP No. 730/10 Quick Measuring-R. 20-100N·m Inside square stitch size 9 x 12 mm L. 370mm	4018754266203
50184012	730/12 QUICK	Torque wrench service MANOSKOP No. 730/12 Quick Measuring-R. 25-130N·m Inside square stitch size 14 x 18 mm L. 410mm	4018754268863
50184020	730/20 QUICK	Torque wrench service MANOSKOP No. 730/20 Quick Measuring-R. 40-200N·m Inside square stitch size 14 x 18 mm L. 455mm	4018754268870
50184030	730/30 QUICK	Torque wrench service MANOSKOP No. 730/30 Quick Measuring-R. 60-300N·m Inside square stitch size 14 x 18 mm L. 520mm	4018754324071
50184040	730/40 QUICK	Torque wrench service MANOSKOP No. 730/40 Quick Measuring-R. 80-400N·m Inside square stitch size 14 x 18 mm L. 590mm	4018754268887
50184065	730/65 QUICK	Torque wrench service MANOSKOP No. 730/65 Quick Measuring-R. 130-650N·m Inside square stitch size 14 x 18 mm L. 875mm	4018754268894
50184565	730II/65 QUICK	Torque wrench service MANOSKOP No. 730II/65 Quick Measuring-R. 130-650N·m Inside square stitch size 22 x 28 mm L. 897mm	4018754268900

## GTIN-Code.





**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal