


- Instrument for measuring toothed and slotted holes
- $\varnothing 8\text{mm}$ dial gauge clamping shank
- Supplied with dial gauge 0,01 $\varnothing 60$
- Handle with insulation chamber
- Suppliable with MD(Widia) spheres : $\varnothing 1.000 - 1.500$
- 2.000 - 2.500 - 3.000 - 3.500 - 4.000 - 4.500 - 5.000 -
5.500 - 6.000 mm

- Strumento per la misurazione di fori dentati e scanalati
- Attacco comparatore $\varnothing 8\text{mm}$
- Di serie comparatore 0,01 $\varnothing 60$
- Impugnatura con camera di isolamento
- Fornibile con sfere MD (Widia): $\varnothing 1.000 - 1.500$
- 2.000 - 2.500 - 3.000 - 3.500 - 4.000 - 4.500 -
5.000 - 5.500 - 6.000 mm

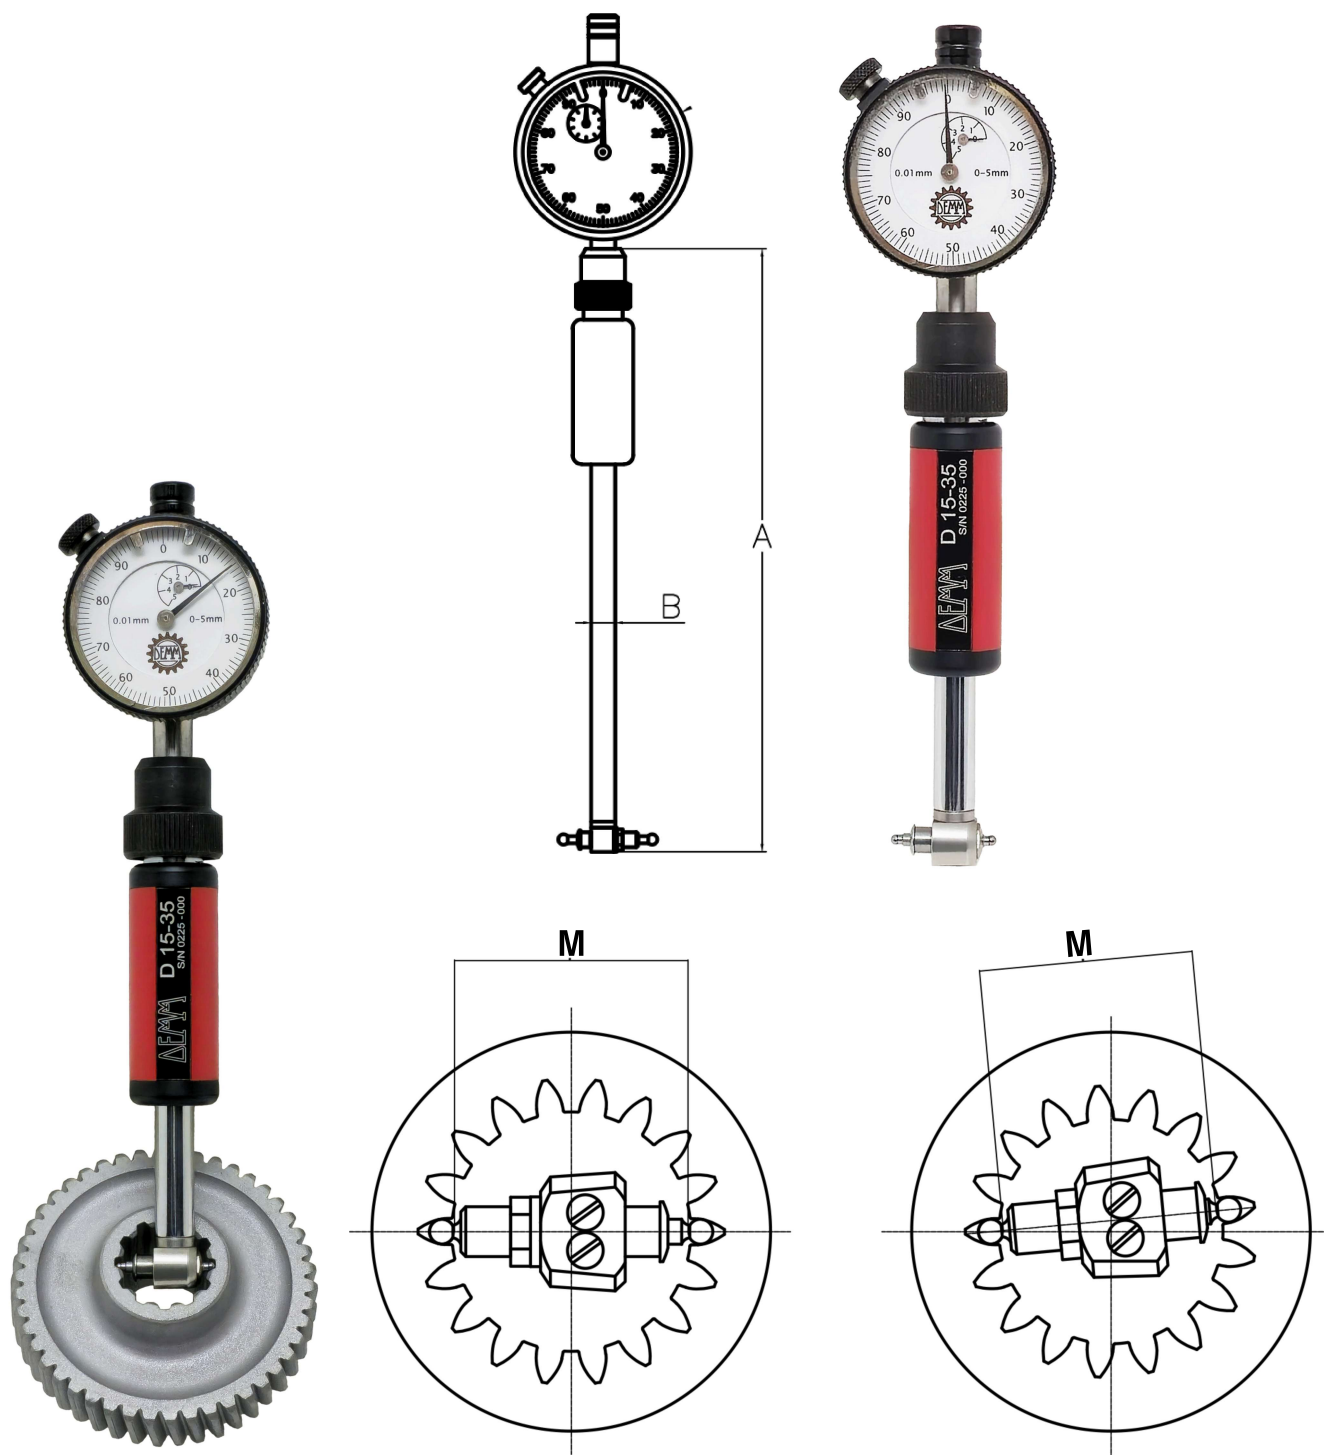

Article	Range (mm)	Hole depth (mm)	Number of fixed tips	Number of washers	Extensions quantity (length) (mm)	A (mm)	B (mm)	Mobile tip movement (mm)	Accuracy μm^*	Repeatability μm	CODE	Kg
ALESO D 15-35	15 - 35	35	4	2	1(9)	105	8	1.6	± 1	1	D00705	0.070
ALESO D 30-100	30 - 100	130	5	3	2(25)	155	13	2.3	± 1	1	D00710	0.150
ALESO D 50-210	50 - 210	250	6	3	1(25) - 2(55)	280	13	3.3	± 1	1	D00720	0.220